


NPS	DN	CLASS	L	D	D1	D2	B	T	N-ØP
0.5"	15	150LB	108	89	60.5	35	11.5	1.6	4-15
0.75"	20		117	98	70	43	11.5	1.6	4-15
1"	25		127	108	79.5	51	11.5	1.6	4-15
1.25"	32		140	117	89	64	13	1.6	4-15
1.5"	40		165	127	98.5	73	14.5	1.6	4-15
2"	50		203	152	120.7	92	16	1.6	4-19
2.5"	65		216	178	139.7	105	18	1.6	4-19
3"	80		241	190	152.4	127	19.5	1.6	4-19
4"	100		292	229	190.5	157	24	1.6	8-19
5"	125		356	254	215.9	186	24	1.6	8-22
6"	150		406	279	241.3	216	26	1.6	8-22
8"	200		495	343	298.5	270	29	1.6	8-22
10"	250		622	406	362	324	31	1.6	12-25
12"	300		698	483	431.8	381	32	1.6	12-25
14"	350		787	533	476.3	413	35	1.6	12-29
16"	400		914	597	539.8	470	37	1.6	12-29
18"	450		978	635	577.9	533	40	1.6	16-22
20"	500		978	699	635	584	43	1.6	20-32
24"	600		1295	813	749.3	692	48	1.6	20-35

NPS	DN	CLASS	L	D	D1	D2	B	T	N-ØP
0.5"	15	300LB	152	95	66.5	35	14.5	1.6	4-15
0.75"	20		178	117	82.5	43	16	1.6	4-19
1"	25		203	124	89	51	17.5	1.6	4-19
1.25"	32		216	133	98.5	64	19.5	1.6	4-19
1.5"	40		229	156	114.5	73	21	1.6	4-22
2"	50		267	165	127	92	23	1.6	8-19
2.5"	65		292	190	149.2	105	26	1.6	8-22
3"	80		318	210	168.3	127	29	1.6	8-22
4"	100		356	254	200	157	32	1.6	8-22
5"	125		400	279	235	186	35	1.6	8-22
6"	150		444	318	269.9	216	37	1.6	12-22
8"	200		559	381	330.2	270	41.5	1.6	12-25
10"	250		622	445	387.4	324	48	1.6	16-29
12"	300		711	521	450.8	381	51	1.6	16-32
14"	350		838	584	514.4	413	54	1.6	20-32
16"	400		864	648	571.5	470	58	1.6	20-35
18"	450		978	711	628.6	533	61	1.6	24-35
20"	500		1016	775	685.8	584	64	1.6	24-35
24"	600		1346	914	812.8	692	70	1.6	24-41

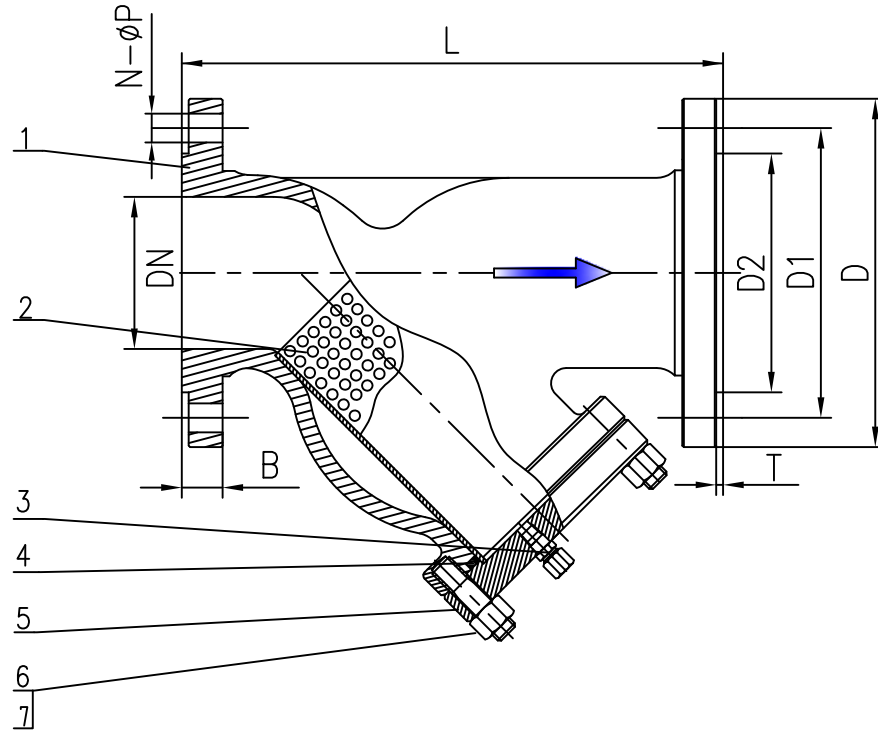

- TECHNICAL REQUIREMENT:
1. DESIGN & MANUFACTURE: ASME B16.34.
 2. FACE TO FACE: ASME B16.10.
 3. FLANGED ENDS: ASME B16.5-RF.
RTJ IS AVAILABLE ON REQUESTED.
 5. TEST & INSPECTION: API 598.

NO.	PARTS NAME	MATERIAL SELECTION				
7	NUT	A194 2H	A194 8	A194 8M	A194 8	A194 8M
6	BOLT	A193 B7	A193 B8	A193 B8M	A193 B8	A193 B8M
5	COVER	A216 WCB	A351 CF8	A351 CF8M	A351 CF3	A351 CF3M
4	GASKET	304+GRAPHITE	304+GRAPHITE	304+GRAPHITE	304+GRAPHITE	304+GRAPHITE
3	DRAIN	CS	CS	SS	SS	SS
2	SCREEN	SS304	SS304	SS316	SS304L	SS316L
1	BODY	A216 WCB	A351 CF8	A351 CF8M	A351 CF3	A351 CF3M

PERFORMANCE LIST			
CLASS	150	300	LB
TEST	SHELL	3.0	7.5
	/	/	/
	/	/	/
MPa			
WORKING TEMPERATURE: -29~425℃			
MEDIUM: WATER, OIL, GAS			

MARK	QTY	SIGN	DATE	MARK	WEIGHT	PROPERTION
WENZHOU SN-JOE FLOW TECH EQUIPMENT CO., LTD. qiao@snjoe.com						
DESIGN	STANDARDIZATION			MARK	WEIGHT	PROPERTION
CHECK	APPROVE					
AUDIT						
PROCESS	DATE					

Y-TYPE STRAINERS