


**ODDG Series**

系列高速地辊式分切机  
High Speed Floor Roll Slitting Machine

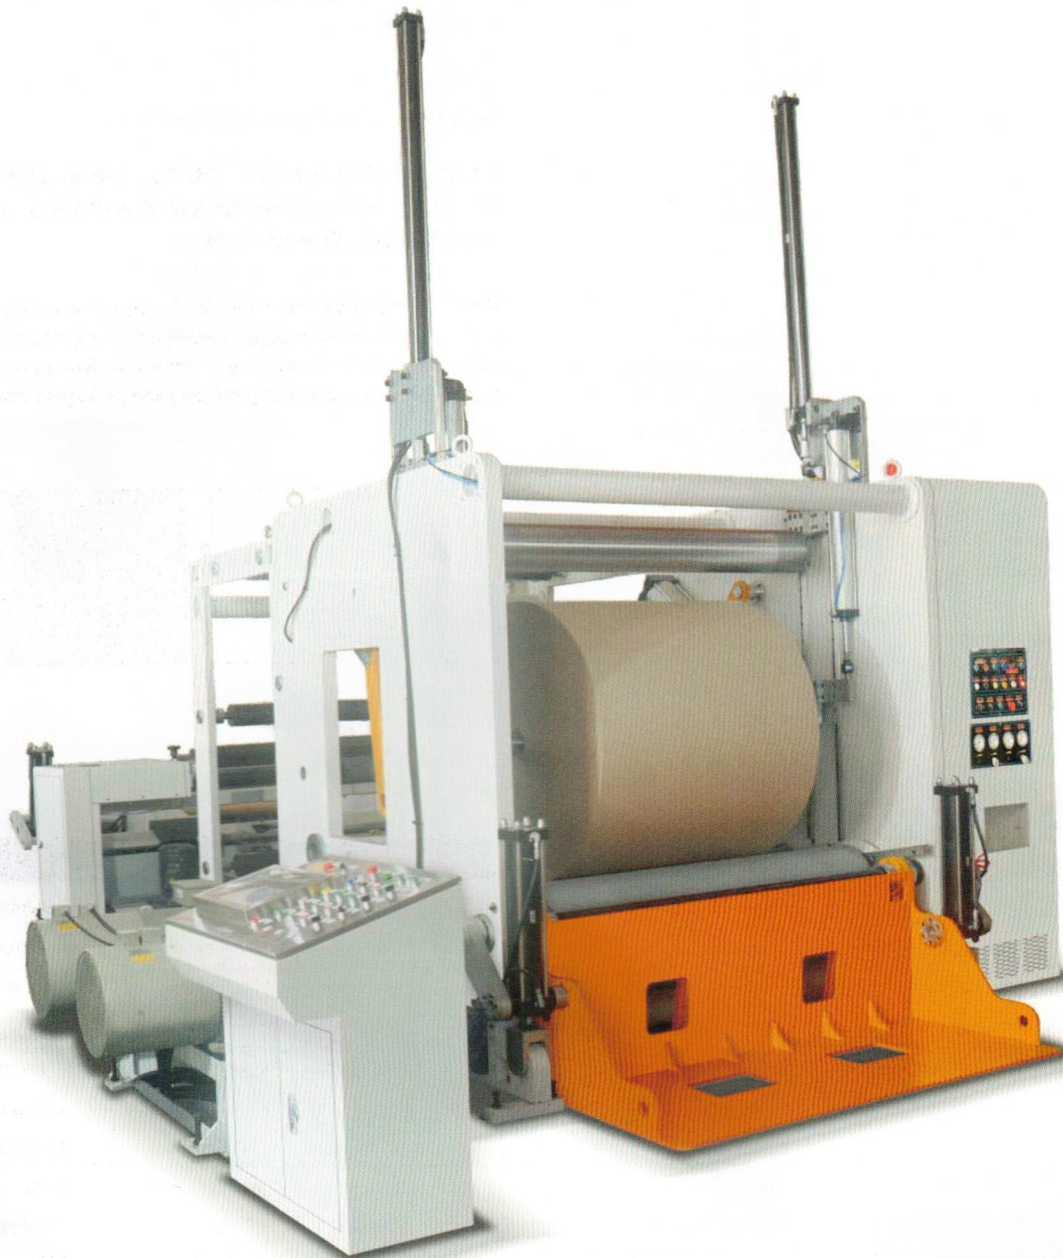

**性能及特点: Performances and Features:**

1. 本机采用PLC控制定长，具有自动计数，无料报警停机功能。
2. 放卷采用自动上料，配置自动纠偏功能。
3. 收卷采用伺服电机控制，高速高效稳定。
4. 圆刀分切结构，废边采用风机自动排除。
5. 液压自动卸料，节省人工。

1. The machine adopt PLC system to control the cutting length with auto counting and alarming stop function.
2. Unwinder adopts auto loading system and equipped with web guiding system.
3. Rewinding part is controlled by servo motor ensure machine running stable in high speed.
4. Machine comes with slitting function equipped with trim reject fan to remove the slit edge of web.
5. Rewinder adopts Hydraulic Auto unloading system that liberate the workforce.

**适用范围: Scope of Application:**

本机适用于多种大型卷筒原纸，如双胶纸、铜板纸、淋膜纸、白卡纸、特种纸、纸塑复合材料等卷筒包装材料的分条复卷，广泛应用于纸制品加工业、印刷包装行业等。

The machine is suitable for slitting big jumbo roll materials, such as paper, double adhesive paper, straw paper, copperboard paper, white board, aluminum foil, The machine is widely apply to paper products processing industry, printing and packaging industry.



**主要技术参数 / The main technical parameters**

型号	Model	ODDG-1300	ODDG-1600	ODDG-2000	ODDG-2600
最大放卷宽度	Max. Web width	1300mm	1600mm	2000mm	2600mm
最大放卷直径	Max. Unwinder Diameter	φ 1500mm(定制1800mm)	φ 1500mm(定制1800mm)	φ 1500mm(定制1800mm)	φ 1500mm(定制1800mm)
最大收卷直径	Max. Rewinder Diameter	φ 1200mm(定制1500mm)	φ 1200mm(定制1500mm)	φ 1200mm(定制1500mm)	φ 1200mm(定制1500mm)
分切最小成品宽度	Min. Rewind Web Width	60mm	60mm	60mm	60mm
分切速度	Slitting Speed	600-1000米/分 m/min	600-1000米/分 m/min	600-1000米/分 m/min	600-1000米/分 m/min
分切精度	Precision Of Slitting	±0.2mm	±0.2mm	±0.2mm	±0.2mm
原材料范围	Cutting Thickness	50-1000g/m2	50-1000g/m2	50-1000g/m2	50-1000g/m2
总功率	Total Power	35kw	35kw	40kw	50kw
机器重量	Machine Weight	10000kg	12000kg	14000kg	17000kg
外形尺寸	Overall Dimension	8500×4900×3550mm	8500×5300×3550mm	8500×5800×3550mm	8500×6400×3550mm