

Hongwei Company reserves the right of final explanation and revision for the photos and other contents in this catalogue.
The pictures and product features in this catalog are for reference only. Subject to change without notice.
The products in this catalogue are real shots, all rights reserved, pirates must investigate.

此画册中的图片与其它内容最终解释权归本公司所有。
此画册中的图片和产品特点参数仅供参考。如有变动,恕不通知。
本画册中的产品均为实景拍摄,版权所有,盗版必究!



Environmental protection
环保



Green product
绿色产品



Biodegradable
降解



新科机械

瑞安市新科机械有限公司
RUIAN XINKE MACHINERY CO.,LTD

地址: 浙江省瑞安市上望街道工业区
电话: 0086 139-6772-8878
热线: 0577-65151618
传真: 0577-65151638
网址: thinkermachine.com
邮箱: admin@raxinke.com

Add: Shangwang Street Industrial Zone, Ruian City,
Zhejiang Province
Tel: 0086 139-6772-8878
Hotline: 0577-65151618
Fax: 0577-65151638
Web: thinkermachine.com
E-mail: admin@raxinke.com




Paper bag
ackaging solution provider
纸袋包装解决方案供应商



新科机械

Keep up with the times and bring forth the new

与时俱进 推陈出新

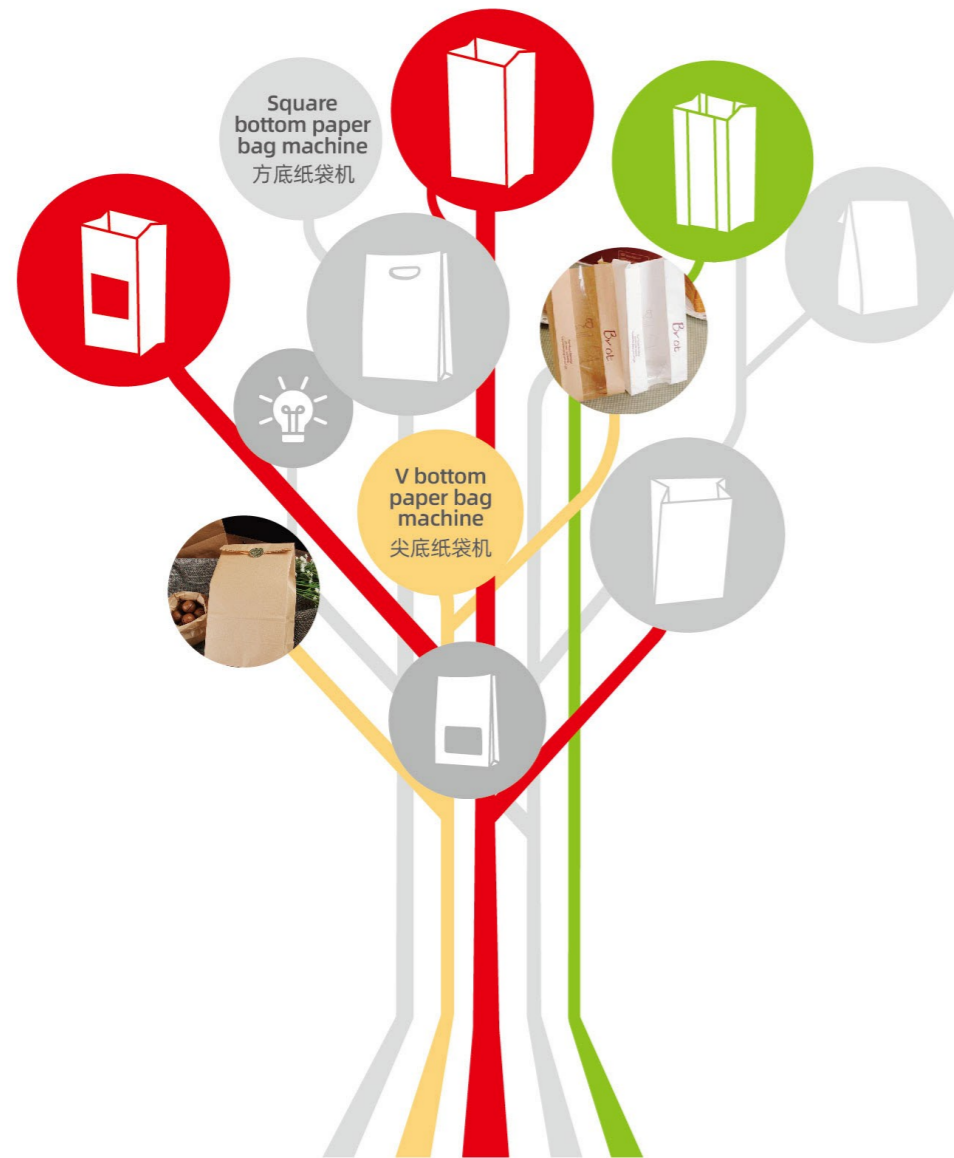

Continuous innovation based on customer needs

基于客户需求持续创新

About us 关于我们

Ruian Xinke Machinery Co.,Ltd. is a professional enterprise producing complete sets of paper bag equipment. To give client completely solutions of manufacturing paper bags based on client's real demand. Taking science and technology as support, customer requirement as guideline, and perfect after-sales service as guarantee, we try our best to manufacture excellent equipment, actively developing new-type equipment. Only high quality equipment can win the widest market. Hence, we strictly focus on manufacturing every component with high standard quality of paper Bag Machines and paper bag auxiliary machine since the beginning.

瑞安市新科机械有限公司是一家生产成套纸袋设备的专业企业。根据客户的实际需求，为客户提供完整的纸袋生产解决方案。以科技为支撑，以客户需求为导向，以完善的售后服务为保证，全力打造优质设备，积极开发新型设备。只有高质量的设备才能赢得最广泛的市场，因此，我们从一开始就严格专注于制造高质量的纸袋机和纸袋辅机的每一个部件。

Xinke technology is used for familiar products such as foods, Medicine, chemicals, shopping bag in department stores, etc. Xinke promises to deliver security, safety and smiles for all customers, and also, we will continue to make efforts bear in mind the current needs and interests of our customers. We have already built business relationships with over 100 countries and have passed ISO9001: 2008 quality certificated system and CE safety certificated system. With rich technology and capital resource, we pay high attention to the new product innovation. Creating value for customers first is the only way to achieve self-worth. We look forward to cooperating with you!

新技术适用于百货公司的食品、医药、化工、购物袋等常见产品。新科承诺为所有客户提供安全、安全、微笑的服务，同时，我们也将牢记客户当前的需求和利益，继续努力。我们已经与全球100多个国家和地区的客户建立了业务关系，公司已通过ISO9001: 2008质量体系认证和CE欧盟认证。公司拥有雄厚的技术和资金资源，高度重视新产品的创新。为客户创造价值是实现自我价值的唯一途径。我们期待与您的合作!



Green products win the future

绿色产品 共赢未来

We pay attention to environmental protection in order to achieve the goal of "Green XINKE, Green Products, Green World". By analyzing the impact of our own R&D and production on the environment, we have determined that environmental protection and energy conservation will be implemented in all aspects of product culture, design, R&D and manufacturing, and company operations.

我们关注环境保护，以实现“绿色新科，绿色产品，绿色世界”的目标。通过分析自身的研发生产对环境的影响，我们确定了将环保节能贯彻到产品文化、设计、研发和制造以及公司运作的方方面面中。



We are passionate about never stopping

我们匠心倾注 从未止步



VALUES 价值观

We are meticulous, impeccably precise, let our customer enjoy our products for a century.

我们一丝不苟，让客户无可挑剔，为了百年后的存在

Eco-friendly Manufacturing 环保制造

Development And Production Of Green Products And Technology

开发和生产绿色产品及技术

Workplace Gas Emissions Reduction

减少工作场所的温室气体排放



Product Innovation 产品创新

Innovation begins with Professional service

创新始于专业的服务

The first step to customer satisfaction is to understand customer needs. To this end, we undertake new customers, the first thing to complete and accurate listening to the needs of customers.

赢取客户满意的第一步是理解客户需求。为此，我们承接新客户的时候，首先要完整而准确的倾听客户的需求。

Win-win 共赢

Maximize production efficiency

实现生产效益最大化

Excellent green production solutions
优秀的绿色生产解决方案



It is our responsibility to produce
biodegradable environmentally friendly products
以生产可降解的环保产品为己任



A variety of products meet the different needs of customers

多种产品满足客户不同需求



V bottom paper bag machine
尖底纸袋机



Square bottom paper bag machine
方底纸袋机



We create the higher quality products for our customers from the love of the industry. We pride in that we almost turn the requirements into a customized solutions .

正是对行业的热爱，我们才能为客户创造出更高品质的产品。我们几乎将所有的要求都转化成了定制的解决方案，对我们来说这是一种骄傲。




Paper Bag With Handle
手提袋



XKFD-180/220/280/330/450

Adjustable Roll Feeding Square Bottom
Paper Bag Machine

可调式卷筒方底纸袋机

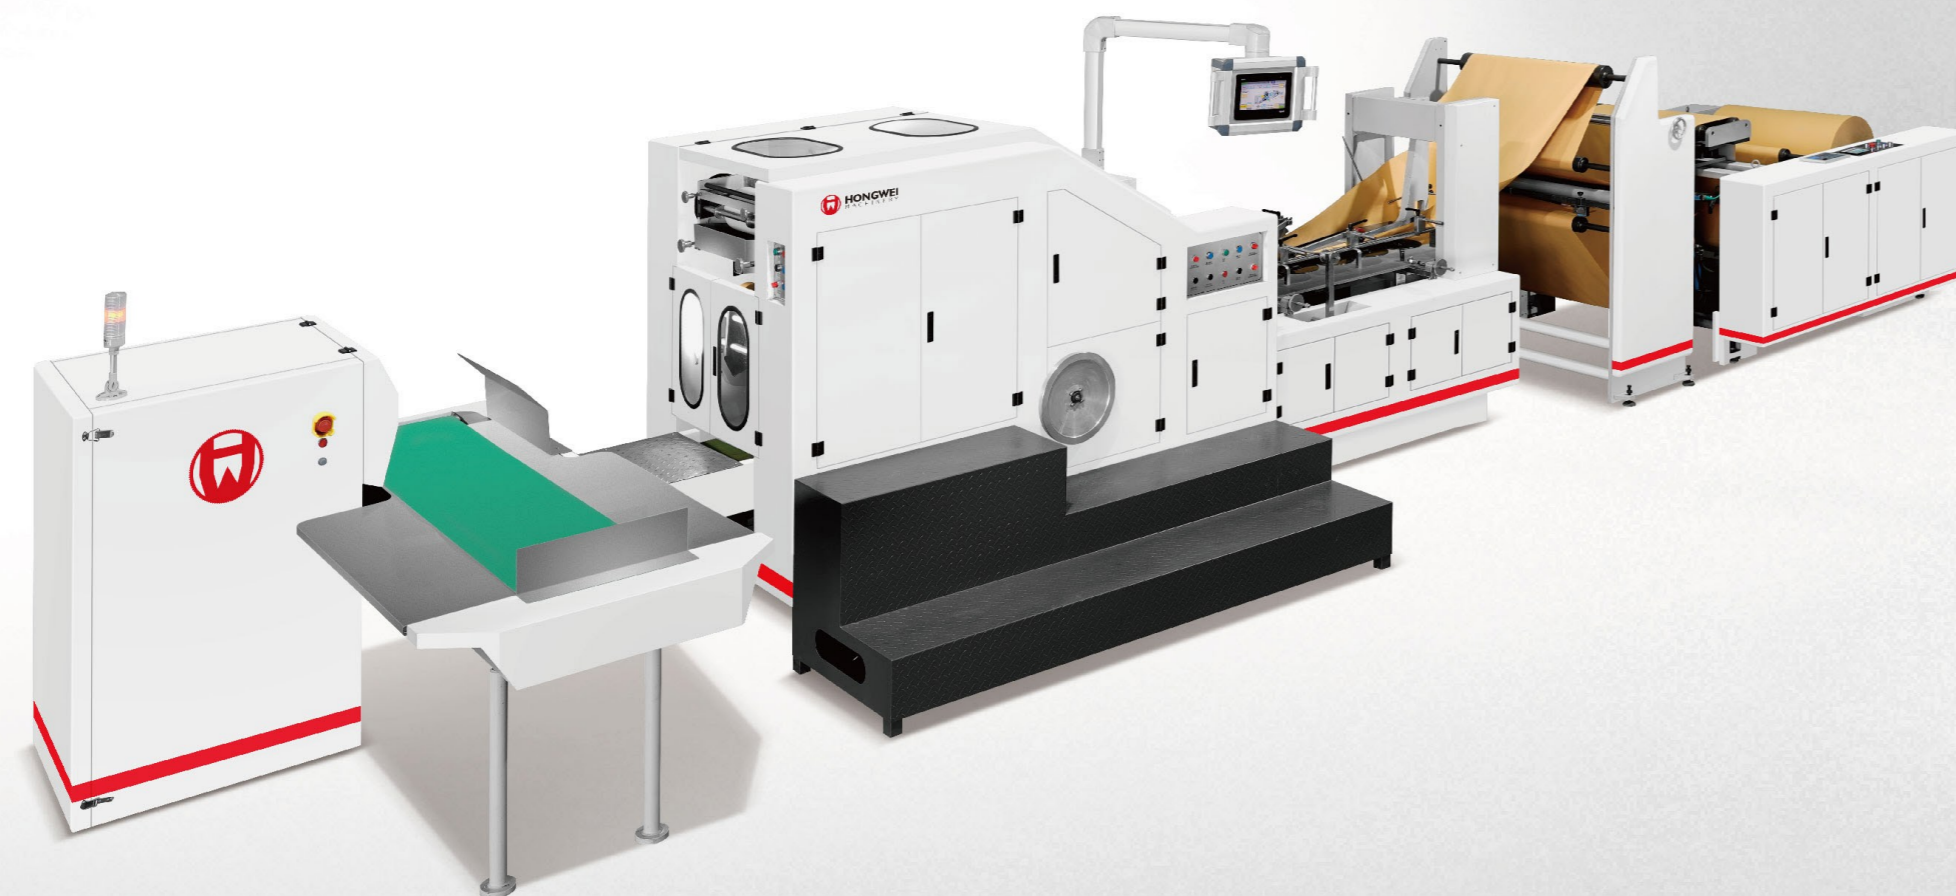

Product Introduction

This machine can use the rolling paper, which is made of primary color paper or printed to produce square bottom paper bag at one time. This machine can produce various of paper bags, with fast speed, high production efficiency, is an ideal equipment for paper bag production.

This machine is composed of rolling paper feed (hydraulic feeding, automatic deviation correction, constant tension), side glue, printing paper electric eye tracking, original paper into roll, fixed length traction cutting, bag bottom indentation opening bottom, bag bottom gluing folding forming and bag output. The whole machine is controlled by the computer central control system, the touch screen display, and the servo motor controls the length of the paper bag.

According to customer needs, two / four-color printing machine, Paper bag windowing device and paper bag hand holding device can be customized.

产品简介

本机用卷筒料纸，将原色纸或印刷好的卷筒纸由本机一次性完成方底纸袋制作。本机可生产多种规格的纸袋，具有速度快，生产效率高，是纸袋生产的理想设备。

此机由卷筒放料（液压上料，自动纠偏，恒张力）、侧边上胶、印刷纸电眼跟踪、原纸成筒、定长牵引切断、袋底压痕开底、袋底上胶折底成型、出袋等组成。整机由计算机中央控制系统控制，触摸屏显示，伺服电机控制纸袋长度。

可根据客户需求，加装二色/四色印刷机，纸袋开窗及纸袋手提孔装置。

Technical Parameter 技术参数

Model	型号	XKFD-280	XKFD-330	XKFD-450
Paper Width (Mm)	纸料宽度 (mm)	345-910	450-1010	630-1300
Paper Bag Cutting Length (Mm)	纸筒切长 (mm)	270-530	270-530	270-530
Paper Bag Width (Mm)	纸袋宽度 (mm)	120-280	150-330	220-450
Length Of Paper Bag (Mm)	纸袋长度 (mm)	225-450	225-450	210-450
Width Of Bag Bottom (Mm)	袋底宽度 (mm)	60-160	60-160	80-180
Paper Thickness (G/m ²)	纸张克重 (g/m ²)	60-160	60-160	80-160
Inner Diameter Of Paper Core (Mm)	纸芯内径 (mm)	76	76	76
Maximum Diameter Of Unwinding (Mm)	放料最大直径 (mm)	1200	1200	1200
Maximum Bag Making Speed (Pcs/min)	最大制袋速度 (pcs/min)	180	160	150
Total Machine Power (Kw)	机器总功率 (kw)	12	12	15
Machine Weight (Kg)	机器重量 (kg)	7000	8000	9000
Dimensions (Mm)	外形尺寸 (mm)	10500×3600×1900	10500×3700×1900	10500×3800×1900

XKR-180

Paper Bag Making Machine With 2 Colors Printing Inline

可调式卷筒带两色印刷方底纸袋机



Product Introduction


HWR-180 Paper bag making machine with 2 colors printing inline, It has new equipment speed, high production efficiency, adjustment range of advantages, lack of comprehensive domestic like product and place improved, this device is the primary web by the printing machine, side gluing, folding, tube cutting, gluing the bottom, folding the bottom of the bag, finish the bag, the whole machine by the central computer control system, touch-screen display, servo motor control system bag length, can produce a variety of specifications bags, fastest up every minute 180 bags, much less labor cost reduction is the preferred paper production and processing equipment.

产品简介


XKR-180型带2色印刷可调式卷筒底纸袋机一体机，它具有速度快、生产效益高、调节范围大的优点，综合国内同类产品不足之处而改进的新型设备，此设备是将原色的卷筒纸由本机一次完成印刷、侧边上胶、折叠成微、纸筒切断、底部涂胶、袋底成型、出袋，整机由计算机中央控制系统控制、触摸屏显示，伺服电机控制制纸袋长短，可生产多种规格纸袋，每分钟最快可达180袋，大大减少了人工成本，是纸袋生产加工的首选设备。

Technical Parameter 技术参数

Model	型号	XKR-180
Paper Thickness	纸张克重	50-130g/m ²
Bag Length	纸袋长度	190-370mm
Bag Width	纸袋宽度	80-180mm
Width Of Bag Bottom	袋子底部宽度	50-105mm
Max. Diameter Of Paper Roll	最大放卷直径	1200mm
The Width Of Paper Roll	卷筒纸放料宽度	600mm
Internal Diameter Of Roll Core	纸芯内直径	76mm
Machine Speed	机器速度	200pcs/min
Machine Power	机器功率	10kw
Machine Total Weight	机器重量	6000kg
Machine Dimension (WxLxH)	机器尺寸	11000x3000x1800mm

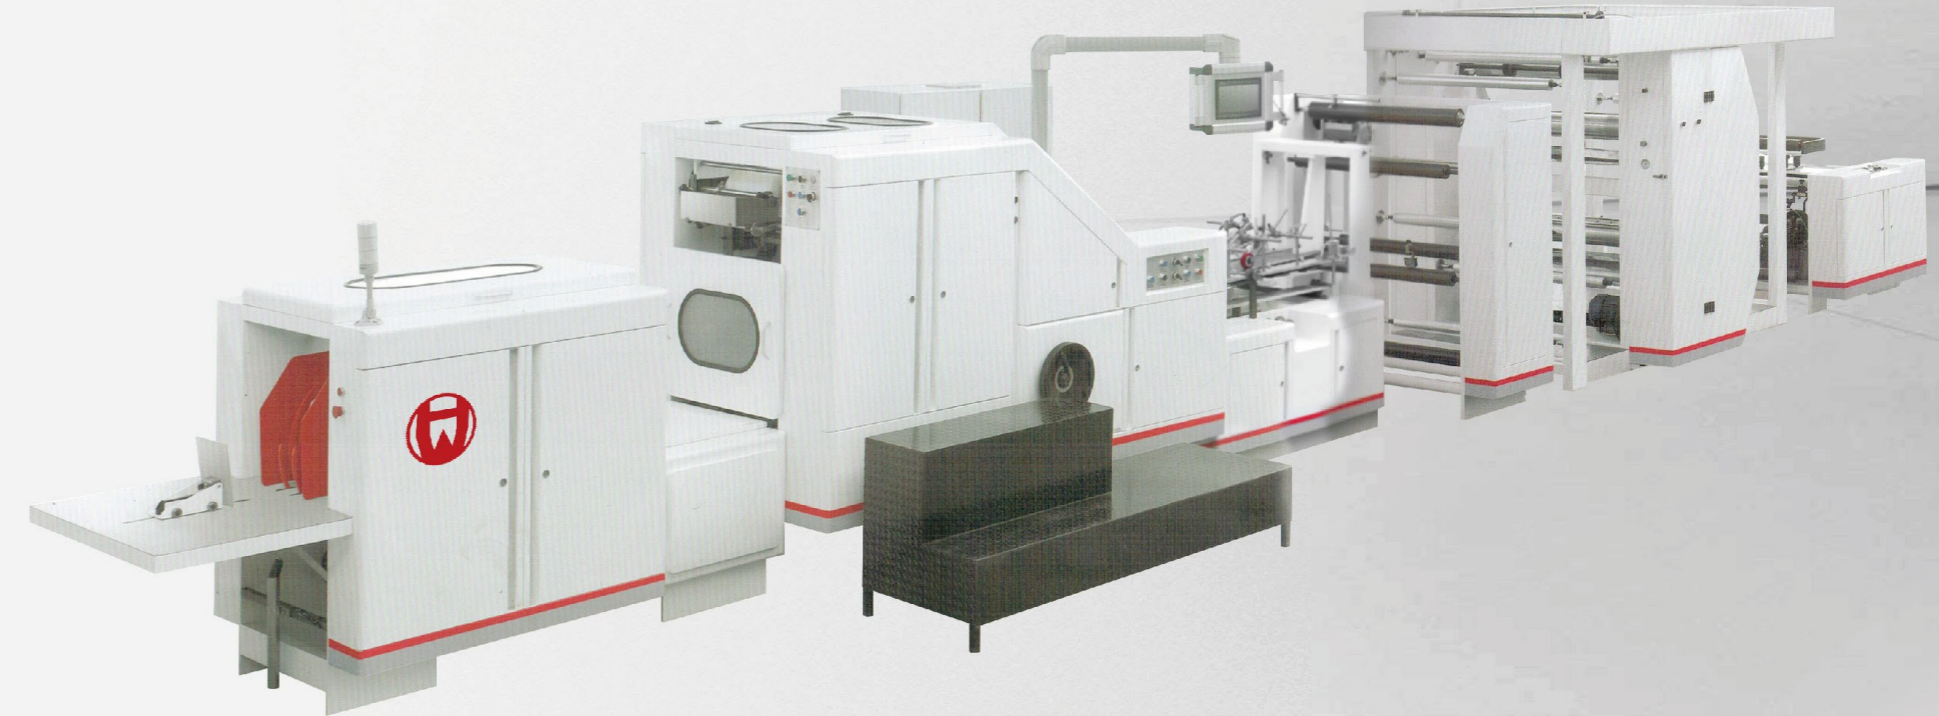



Schematic Diagram 示意图

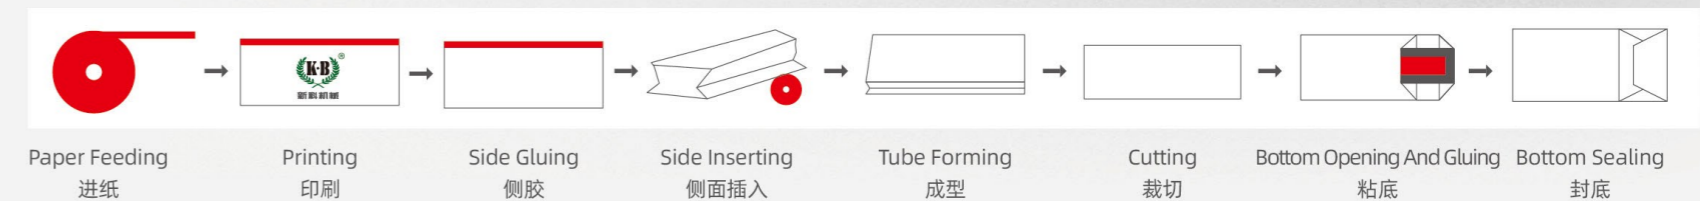

XKFD-330

Adjustable Roll Feeding Square Bottom Paper Bag Machine

可调式卷筒方底纸袋机

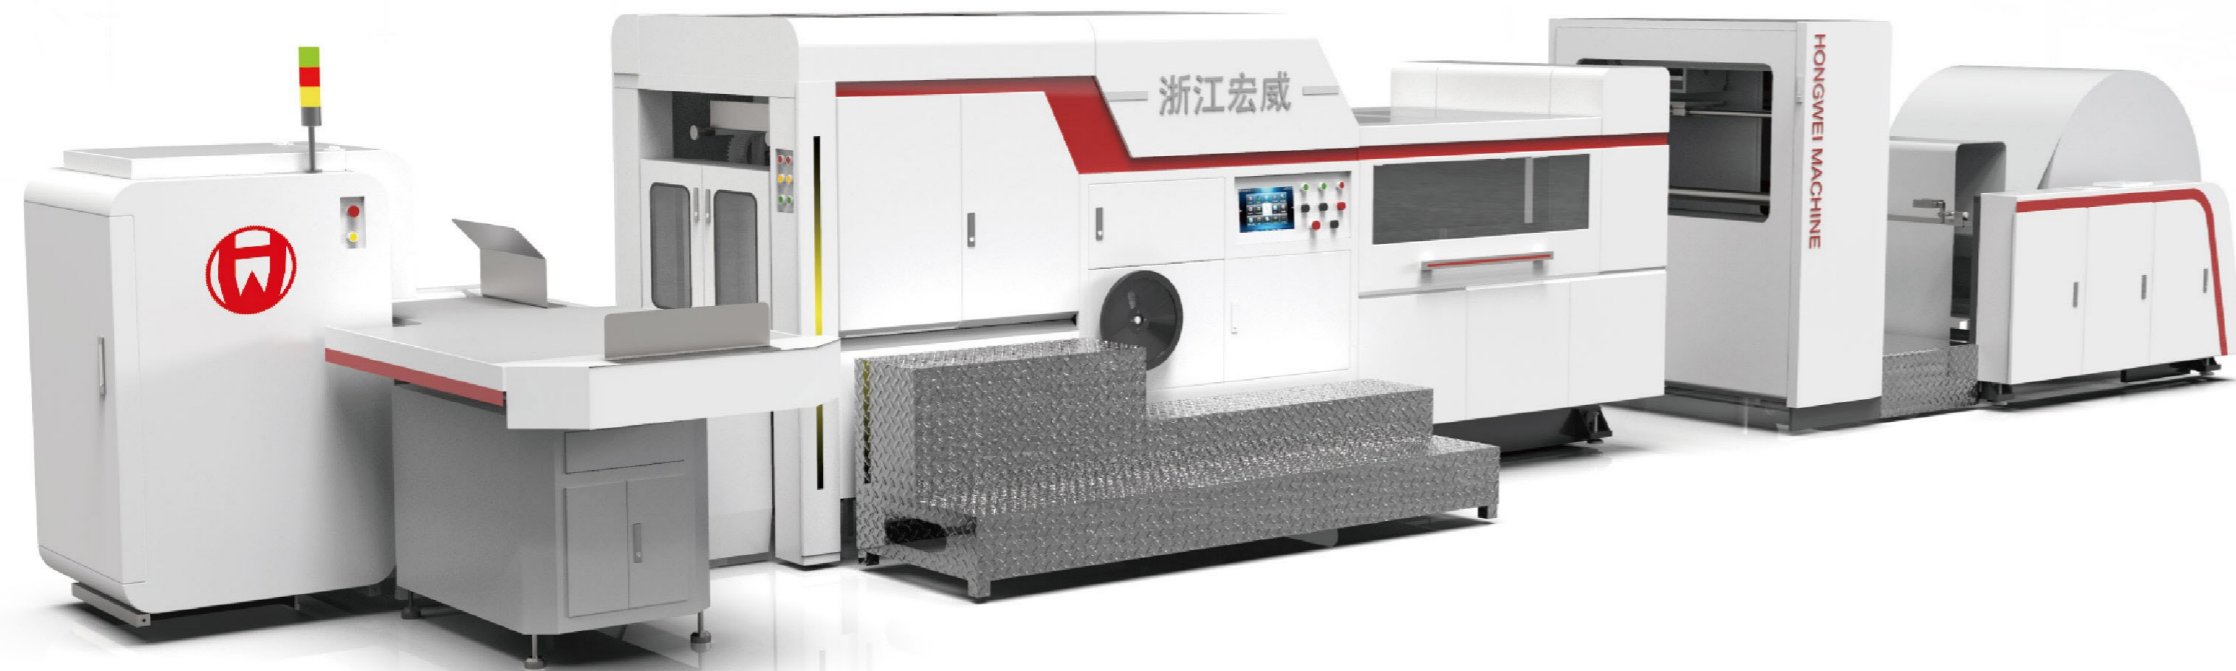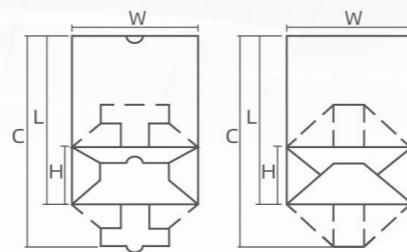

Product Introduction

Machine use roller paper, from primary color paper or printed web paper to square bottom paper bag one times production. The machine can be used in various paper bags with high speed and efficiency. It is an ideal equipment for paper bag production. This machine is composed of roll unwinding (hydraulic feeding, automatic web guide, constant tension), side gluing, printing electric eye tracking, base paper into cylinder, fixed-length traction cutting, bag bottom indentation opening, bag bottom gluing, bag bottom molding, bag sending etc. The whole machine is controlled centrally by PLC touch screen and servo motor controls the length of paper bag. It can pretend 2 color / 4 color printing group, bag surface window lamination device and handgrip hole device according to your need. Can be matched with rope twisting, flat rope handlebar machine, rewinding machine, etc., to make the products more competitive and diversified.

产品简介

本机用于原色纸或印刷好的卷筒纸，由本机一次性完成方底纸袋制作。本机可多种规格的纸袋，具有速度快，生产效率高，是纸袋生产的理想设备。本机由卷筒放料（液压上料，自动纠偏，恒张力）、侧边上胶、印刷纸电眼跟踪、原纸成筒、定长牵引切断、袋底压痕开底、袋底上胶合底成型、出袋整理等组成。整机由PLC触摸屏集中控制，伺服电机控制纸袋长度。可根据客户需求，加装2色/4色印刷机，袋面开窗贴膜装置和手挽孔装置等。可另配套圆绳，扁绳手把机，圆绳复卷机等，使产品更具有竞争力和多样化。

Detail Image 细节图



Raw material loading and unloading adopts hydraulic lifting structure, and unwinding adopts automatic constant tension control.

原料装卸采用液压升降结构，放卷采用全自动恒张力控制。




Italy Original SELECTRA EPC device, reduce the adjustment time of roll alignment and adopt automatic constant tension control.

原料纠偏采用意大利 SELECTRA, 降低纸卷对位调整时间采用全自动恒张力控制。



Imported Switzerland Robatech hot melt glue device to let glue out evenly, let glue stop cleanly. 瑞士ROBATECH进口胶机, 使喷胶均匀, 停胶干净便于清洁。



Use France Schneider PLC Touch Screen Human-Computer Interface, operate and control easily.

采用法国 SCHNEIDER PLC 触摸屏人机界面, 操作功能一目了然, 便于掌控。



France Original Schneider Servo Motor and Germany Original SICK Photoelectric Eye Correction, tracking printing bag accurately.

采用法国原装 SCHNEIDER 伺服电机搭配德国原装 SICK 光电眼修正, 精确跟踪印刷袋尺寸。

Technical Parameter 技术参数

Model	型号	XKFD-330
Paper Width (Mm)	纸料宽度 (mm)	450-1010
Paper Tube Cutting Length (Mm)	纸筒切长 (mm)	270-530
Paper Bag Width (Mm)	纸袋宽度 (mm)	150-330
Length Of Paper Bag (Mm)	纸袋长度 (mm)	225-450
Width Of Bag Bottom (Mm)	袋底宽度 (mm)	60-160
Paper Thickness (G/m ²)	纸张克重 (g/m ²)	60-160
Inner Diameter Of Paper Core (Mm)	纸芯内径 (mm)	76
Maximum Diameter Of Unwinding (Mm)	放料最大直径 (mm)	1200
Maximum Bag Making Speed (Pcs/min)	最大制袋速度 (pcs/min)	160
Total Machine Power (Kw)	机器总功率 (kw)	12
Machine Weight (Kg)	机器重量 (kg)	8000
Dimensions (Mm)	外形尺寸 (mm)	10500×3700×1900

XKJD-270

High Speed Roll Feeding V Bottom Paper Bag Machine

高速食品尖底袋纸袋机




Detail Image 细节图

	It's equipped with an accurate photocell system. 精确的色标跟踪系统。		Heavy chassis, stable operation when high speed running 底盘重, 高速运行稳定。
	SEVEN Servo Motor PLC system control whole Line. 伺服系统PLC控制整机, 可自动调节一定范围内袋子的任意长度。		It controls bag's length through the human-machine interface 人机界面调节袋子长度。
	Imported Switzerland Robatech hot melt glue device to let glue out evenly, let glue stop cleanly 瑞士ROBATECH进口胶机, 使喷胶均匀, 停胶干净便于清洁。		

Technical Parameter 技术参数

Model	型号	XKJD-270
Paper Roll Diameter	放料直径	1200mm
Paper Roll Width	纸张放料宽度	220-810mm
Bag Width	纸袋宽度	80-270mm
Length Of Cutting	纸袋切长	105-450mm
Depth Of Bag Side	插边尺寸	10-60mm
Paper Thickness	纸张厚度	35-80g/m ²
Precision Of Paper Bag	纸袋精度	±1.5
Working Speed	切袋速度	50-500pcs/min
Size Of Machine	机器尺寸	7100×2050×1850mm
Total Weight	机器重量	5000kg
Total Power	整机功率	20kw

Schematic Diagram 示意图

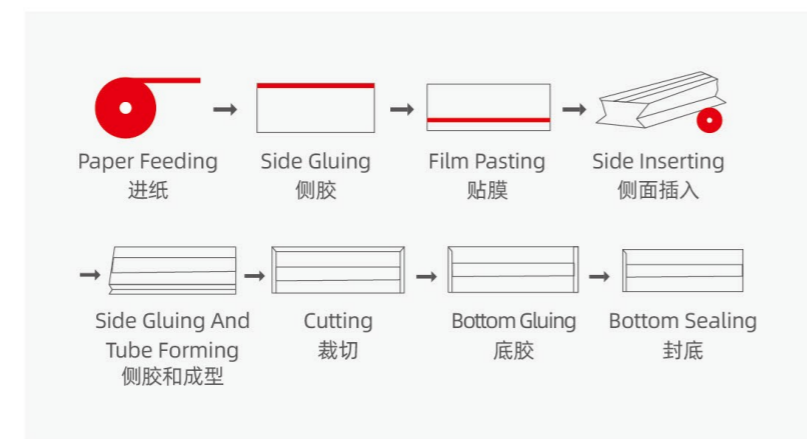

XKJD-350

Full Automatic High Speed Food Paper Bag Making Machine With 2 Colors Printing Inline


全自动高速食品纸袋机带2色印刷



Technical Parameter 技术参数

Model	型号	XKJD-350
Paper Roll Diameter	放料直径	1200mm
Paper Roll Width	纸张放料宽度	970mm
Bag Width	纸袋宽度	80-350mm
Length Of Cutting	纸袋切长	155-765mm
Depth Of Bag Side	插边尺寸	10-60mm
Paper Thickness	纸张厚度	35-80gsm
Precision Of Paper Bag	纸袋精度	±1.5
Printing Color	印刷颜色	2 色
Working Speed	切袋速度	50-500pcs/min
Size Of Machine	机器尺寸	10500×2250×1850mm
Total Weight	机器重量	7000kg
Total Power	整机功率	20kw

Schematic Diagram 示意图

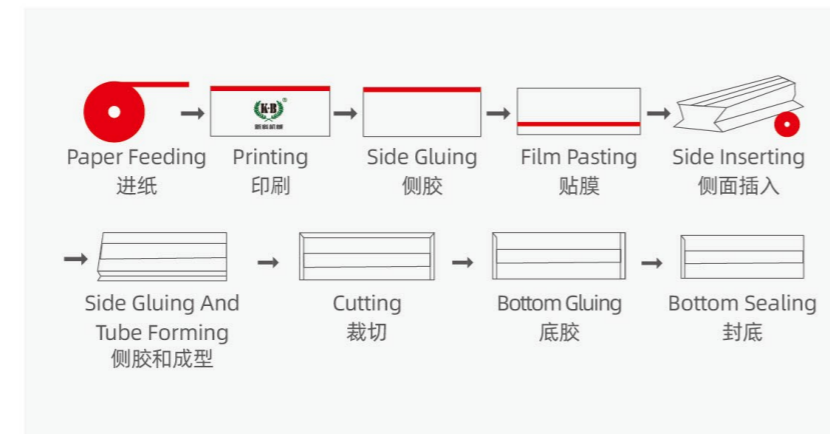

XKJD-400

Adjustable Roll Feeding V Bottom Paper Bag Machine

可调式卷筒普通尖底纸袋机



Environmental Protection
环保



Efficient
高效



Intelligent
智能



XINKE MACHINERY

XKJD-400

Adjustable Roll Feeding V Bottom Paper Bag Machine

可调式卷筒普通尖底纸袋机

Product Introduction

The HWJD-400 paper bag machine is made from rolls of primary color paper or printing rolls such as kraft paper, striped kraft paper, oil-gloss paper, food coated paper and other paper materials. The bag making process is from roll paper to folding, forming, cutting, gluing, bottom folding and make paper bag output at one time. This model is more convenient to operate, more efficient and more stable. It is an ideal equipment for producing various shopping bags, snack food bags, bread bags, dried fruit bags and other environmentally friendly paper bags.

Detail Image 细节图



Using touch screen man-machine interface, real-time work status is realized, that can be set by the touch screen man-machine interface. 采用触摸屏人机界面，工作状态实时现实，可设置的点数标记功能。



Ultra-precision Servo Motor control system ensures stable and efficient operation of the machine. 超精密伺服控制系统，确保机器稳定、高效运行。



Material loading and unloading adopts pneumatic lifting structure. 材料装卸采用气动升降结构。



Automatic constant tension control system, the tension is not bad from beginning to end. 全自动恒张力控制系统，张力从始至终丝毫不差。




Photoelectric sensor limit automatic correction control system, stable correction, energy saving and long life. 光电传感器限位自动纠偏控制系统，纠偏稳定、节能、寿命长。



Accurate color code tracking system, automatic shutdown for color code errors. 精确的色标跟踪系统，色标错误自动停机。

Technical Parameter 技术参数

Model	型号	XKJD-400			
Paper Bag Length	纸袋长度	120-420mm(L)	Insert Paper Edge	插边宽度	20-100mm(2M)
Paper Bag Width	纸袋宽度	80-240mm(W)	Machine power	整机功率	6kw
Paper Thickness	纸袋厚度	40-80g/m ²	Machine weight	整机重量	1800kg
Machine Speed	机械速度	60-400pcs/min	Machine size	整机尺寸	4400x1700x1600mm
Paper Roll Width	纸卷宽度	260-720mm			



XKFD-330T/450T/450BT

Fully Automatic Square Bottom Paper Bag Machine With Twisted Rope Handle Inline


全自动方底圆绳手提纸袋机

Product Introduction

Fully automatic square bottom paper bag machine is designed for the production of paper bags with twisted handles. It is suitable for mass production of shopping bags in industries such as food and clothing. The one-line process consists of twisted handles making from paper rolls and twisted rope, delivery of handles to paste unit, pre-cutting of paper on position of rope, patch position gluing, handle pasting, and paper bag making. The paper bag making process consists of side gluing, tube forming, cutting, creasing, bottom gluing, bottom forming and bag delivery. This machine adopts German imported high-speed motion controller (CPU), which controls the operation of servo through high-speed bus to ensure stable movement and smooth motion curve. It is the automatic square bottom paper bag equipment with handles inline preferred by the majority of printing and packaging manufacturers.

产品简介

全自动方底纸袋机，用于生产带手挽的手提纸袋。本机特别适用于食品和服装等行业的购物袋批量生产。该机由手挽机将卷绳和纸片卷筒制成手挽，通过输送系统将手挽送至贴把机，再将原色或印刷好的卷筒纸进行纸绳位预点断、贴片位涂胶、自动粘贴手挽，再由主机将贴有手挽的纸张进行涂边胶、成筒、切断、压痕、底部涂胶、袋底成型并输送出袋，整个过程一次性同步完成。本机采用德国原装进口高速运动控制器（CPU），通过高速总线控制伺服的运行，保证运动稳定，运动曲线平滑，是广大印刷包装厂家首选的全自动手挽方底纸袋设备。

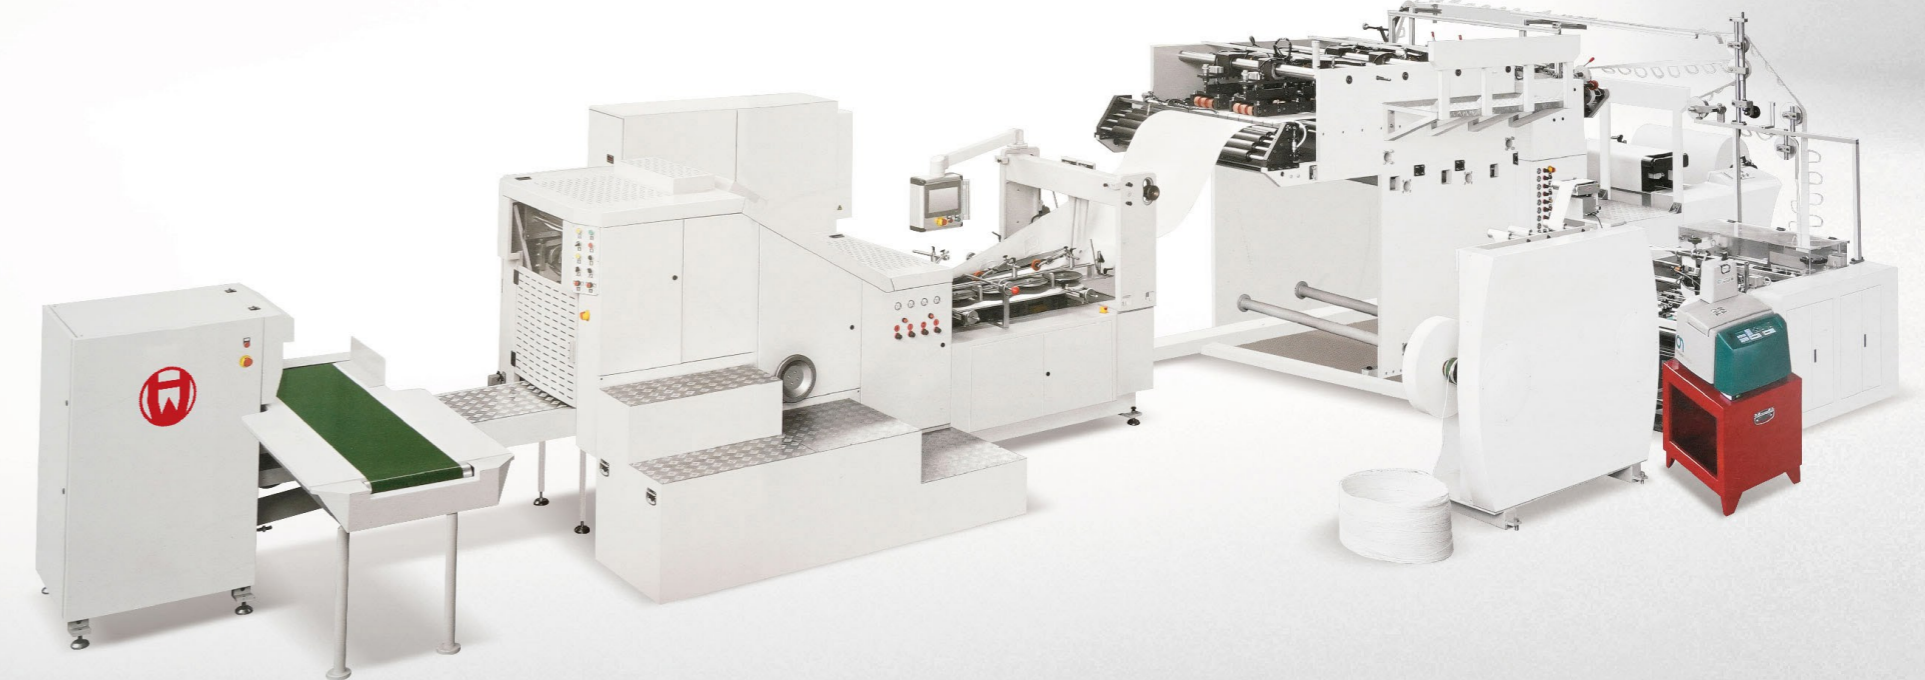

XKFD-330T/450T/450BT

Fully Automatic Square Bottom Paper Bag Machine
With Twisted Rope Handle Inline

全自动方底圆绳手提纸袋机

Main features 主要特点

1. Use France SCHNEIDER touch screen human-computer interface, making the machine easy to operate and control.
2. Adopt France original SCHNEIDER PC control, integrated with optical fiber. Thus ensure stable and high speed running.
3. Adopt France original SCHNEIDER servo motor and German original SICK photoelectric eye correction, tracking printing bag accurately.
4. Raw material loading adopts hydraulic auto-lifting structure. Unwind unit adopts auto tension control.
5. Raw material unwinding EPC adopts Italy SELECTRA, reducing material alignment time.

1. 采用法国SCHNEIDER触摸屏人机界面，操作功能一目了然，便于掌控。
2. 采用法国原装SCHNEIDER控制器（PC），通过与光纤一体化，保证高速运行稳定。
3. 采用法国原装SCHNEIDER伺服电机搭配德国原装SICK光电眼修正，精确跟踪印刷袋尺寸。
4. 原料装卸采用液压自动升降结构，放卷采用全自动恒张力控制。
5. 原料纠偏采用意大利SELECTRA，降低纸卷对位调整时间。

Detail Image 细节图



Gusset
插边



Servo motor
伺服电机



EPC for handle
手挽纸片纠偏



Handle delivery
手挽输送完成



Handle gluing
手挽胶合



Hot melt for handle
手挽涂胶

Schematic Diagram 示意图



Technical Parameter 技术参数

Model	型号	XKFD-330T	XKFD-450T	XKFD-450BT
Cutting Length	纸袋裁切长度	270-530mm	270-530mm	380-760mm
Cutting Length (Handle)	纸袋裁切长度(全)	270-430mm	270-430mm	380-660mm
Bag Width	纸袋宽度	120-330mm	210-450mm	210-450mm
Bag Width (Handle)	纸袋宽度(全)	200-330mm	240-450mm	240-450mm
Bottom Width	袋底宽度	60-180mm	90-180mm	100-220mm
Paper Thickness	纸袋克重	60-150g/m ²	80-150g/m ²	80-150g/m ²
Paper Thickness (Handle)	纸袋克重(全)	80-150g/m ²	80-150g/m ²	80-150g/m ²
Paper Roll Width	纸卷宽度	380-1050mm	590-1290mm	630-1370mm
Paper Roll Width (Handle)	纸卷宽度(全)	620-1050mm	670-1290mm	710-1370mm
Roll Paper Diameter	纸料直径	φ1300mm	φ1300mm	φ1300mm
Paper Core	纸芯内经	φ76mm	φ76mm	φ76mm
Patch Length	手把贴片长度	152mm	190mm	190mm
Patch Width	手把贴片宽度	50mm	50mm	50mm
Handle Distance	纸绳间距	75mm	95mm	95mm
Rope Diameter	手把纸绳直径	φ3-5mm	φ3-5mm	φ3-5mm
Patch Paper Roll Width	手把贴片纸卷宽度	100mm	100mm	100mm
Patch Paper Roll Diameter	手把纸卷直径	φ1200mm	φ1200mm	φ1200mm
Patch Paper Thickness	手把贴片纸克重	100-135g/m ²	100-135g/m ²	100-135g/m ²
Machine Speed	机械速度	30-200bags/min	30-180bags/min	30-150bags/min
(Without Handles) Production Speed For Bags With Handles	纸袋速度	30-180bags/min	30-150bags/min	30-120bags/min
Production Speed For Bags With Handles	带手提速度	30-150bags/min	30-130bags/min	30-130bags/min
Bottom Folding Type	封底方式			
Cutting Knife	裁切刀具方式	锯齿裁切 Sawtooth cutting	锯齿裁切 Sawtooth cutting	锯齿裁切 Sawtooth cutting
Power Supply	总机功率	380V 3phase 4 line 41.5KW	380V 3phase 4 line 41.5KW	380V 3phase 4 line 43.5KW
Machine Weight	整机重量	15000kg	15500kg	16500kg
Machine Size	整机尺寸	14000×6000×2400mm	14000×6000×2400mm	16100×6500×2400mm



XKFJ-400M

Rewinding Machine

复卷机

Technical Parameter 技术参数

Model	型号	XKFJ-400M
Power Dissipation	功耗	2.2kw
Rope Speed	出绳速度	150-180m/min
Rope Diameter	纸绳直径	3-4mm
Machine Weight	机器重量	150kg
Final Diameter Of Coil	最终绳卷内径	76mm
Voltage	电源速度	380v
Power Supply	电源	380v AC/stepless speed regulation
Machine Size	机器尺寸	1050×800×1200mm

XKYS SERIES

Rope Making Machine

打绳机

Technical Parameter 技术参数

Model	型号	XKYS
Paper Width	放纸宽度	20-100mm
Paper String Diameter	纸绳直径	3-6mm
Ropemaking Speed	制绳速度	30×40m/min×2
Power	整机功率	1.5kw
Overall Size	外形尺寸	1580×1440×930mm




Technical Parameter 技术参数

Model	型号	XKSW-10M
Roll Internal Diameter	纸卷内径	Φ76mm (3")
Maximum Roll Diameter	最大纸卷外径	Φ1000mm
Production Speed	生产速度	10000 pair/hour
Voltage	电源	380v 3 phase 5 line
Power	功率	7.8kw
Machine Weight	机器重量	Approx. 1500kg
Machine Dimension	机器外形尺寸	L4000mm×W1300mm×H1500mm
Length Of Hand	手把长度	120-150mm
Patch Width	贴片宽度	30-40mm
Patch Length	贴片长度	152mm
Handle Middle Distance	手挽中间距	75mm
Glue	胶水	Hot-melt glue

XKYS SERIES

Fully Automatic High-speed
Handle Making Machine

全自动高速手挽机

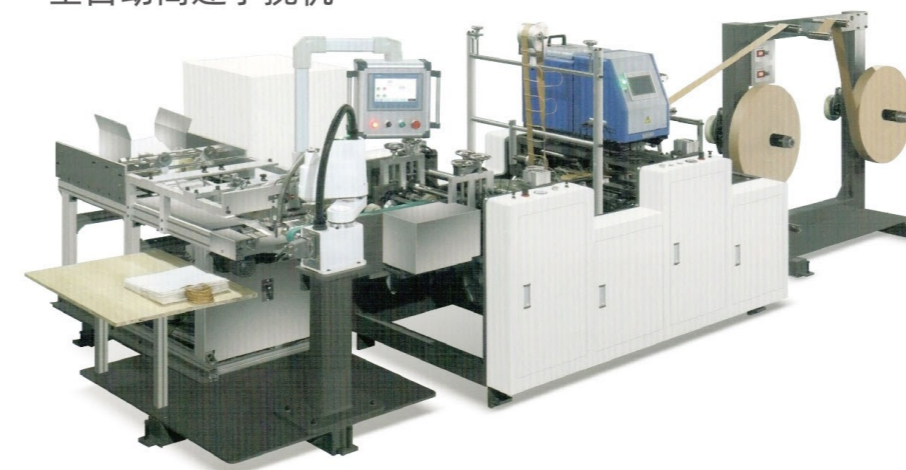

XKSW-10M

Twisted Rope Handle Making Machine

圆绳手挽机



Technical Parameter 技术参数

Model	型号	XKYS
Machine Size	机器尺寸	6000×1600×1500mm
Motor Power	电机功率	2.2kw/1.1kw
Servo Motor	伺服电机	750w(一组)
Robot	机器人	四轴
PLC	PLC	24点
Hot Melt Glue Machine	热熔胶机	6kw
Working Speed	工作速度	35-43个
Handle Glue	手挽胶水	热熔胶(慢干5秒)
Sticky Handle Glue	粘手挽胶水	水胶
Minimum Paper Bag Width	最小纸袋宽度	250mm
Maximum Paper Bag Width	最大纸袋宽度	450mm
Maximum Handle Size	最大手挽尺寸	190mm
Minimum Handle Size	最小手挽尺寸	152mm
Paper Thickness	纸张厚度	80-140g

XKFP-2 Colors

Flexo Printing Machine

2色柔版印刷机



Technical Parameter 技术参数

Model	型号	XKFP2-800	XKFP2-1000	XKFP2-1200	XKFP2-1300
Max. Printing Material Width	最大印料宽度	800mm	1000mm	1200mm	1300mm
Max. Printing Width	最大印刷宽度	760mm	960mm	1160mm	1260mm
Max. Unwinding Diameter	最大放卷直径	1300mm	1300mm	1300mm	1300mm
Max. Rewinding Diameter	最大收卷直径	1300mm	1300mm	1300mm	1300mm
Printing Length Range	印品长度范围	230-1000mm	230-1000mm	230-1000mm	230-1000mm
Printing Speed	印刷速度	5-100m/min	5-100m/min	5-100m/min	5-100m/min
Register Precision	套色精度	≤±0.15mm	≤±0.15mm	≤±0.15mm	≤±0.15mm
Thickness Of Plate (Including The Thickness Of Double Sides Glue)	版材厚度 (包括双面胶厚度)	默认板材厚度加双面胶2.28mm+0.38mm 可根据客户要求订做 Can Be Customized According To Customer Requirements			

XKFP-4 Colors

Flexo Printing Machine

4色柔版印刷机



Technical Parameter 技术参数

Model	型号	XKFP4-800	XKFP4-1000	XKFP4-1200	XKFP4-1300
Max. Printing Material Width	最大印料宽度	800mm	1000mm	1200mm	1300mm
Max. Printing Width	最大印刷宽度	760mm	960mm	1160mm	1260mm
Max. Unwinding Diameter	最大放卷直径	1300mm	1300mm	1300mm	1300mm
Max. Rewinding Diameter	最大收卷直径	1300mm	1300mm	1300mm	1300mm
Printing Length Range	印品长度范围	230-1000mm	230-1000mm	230-1000mm	230-1000mm
Printing Speed	印刷速度	5-100m/min	5-100m/min	5-100m/min	5-100m/min
Register Precision	套色精度	≤±0.15mm	≤±0.15mm	≤±0.15mm	≤±0.15mm
Thickness Of Plate (Including The Thickness Of Double Sides Glue)	版材厚度 (包括双面胶厚度)	默认板材厚度加双面胶2.28mm+0.38mm 可根据客户要求订做 Can Be Customized According To Customer Requirements			

XKBS-180M

Flat Rope Handle Making Machine

扁绳手挽机

Technical Parameter 技术参数

Model	型号	XKBS-180M	XKBS-180M				
Handle Spacing	纸绳间距	84mm(规格1)	80mm/95mm(规格2)	Production Speed	生产速度	6000pairs/h	6000pairs/h
Paper Rope Width	纸绳宽度	12mm	12mm	Power Requirements	输入电源	380v	380v
Paper Rope Length	纸绳长度	352mm	352mm	Total Power	机器功率	10kw	10kw
Paper Thickness	原纸克重	80-140g/m ²	80-140g/m ²	Total weight	机器重量	Appox.4000kg	Appox.4000kg
Paper Width	纸片宽度	40mm	40mm	Overall Dimension	外形尺寸	L7000xW1600xH1500mm	L7000xW1600xH1500mm
Paper Length	纸片长度	152mm	190mm	Glue Type	胶水	Hot-melt glue热熔胶	Hot-melt glue热熔胶

